



HIGH PRESSURE HOSE 1800 BAR

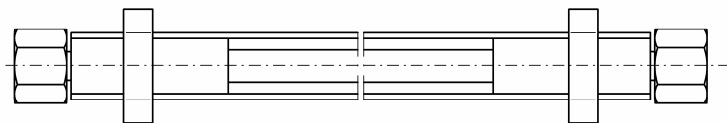

ORDER DENOMINATION:

„High Pressure hose, .. m long, with cap nut on both ends M14x1.5,
Art.Nr. 2-00580-XXXX“ The last 4 digits define the length, e.g. 3m: 2-00580-0003.

LENGTHS ON STOCK:

0,5m; 1m; 2m; 3m; 4m; 5m; 6 m All other lengths can be delivered upon request.

DELIVERY STATE:

Completely assembled, bled and filled with oil.

Standard filling is hydraulic oil. Other liquids are available upon request.

All hoses are equipped with a protection hose. The data printed on the high pressure hose, i.e.: „EN/HDS1800/5/4Q07/PN1800“ are exclusively related to the high-pressure hose.

The minimal bending radius of the high pressure hose is 130 mm.

TECHNICAL DATA:

High pressure hose

max. operating pressure: 1.800 bar

Test pressure: 2.700 bar

min. burst pressure: 4.500 bar

Inner diameter: 5,0 mm

Major diameter: 11,2 mm


Hose core: POM

Pressure bearers: 4 coiling shifts of corrosion proof spring steel wire

Top layer: PA, Nylon 11/12

Protection hose: PVC

Weight: 0,26 kg/m



FASTEC AG
 INDUSTRIEZONE
 SCHÄCHENWALD
 CH-6460 ALTDORF
 SWITZERLAND
 FON +41 41 875 78 30
 FAX +41 41 875 78 31
 INFO@FASTEC.CH
 WWW.FASTEC.CH