


HIGH PRESSURE HOSE 3000 BAR

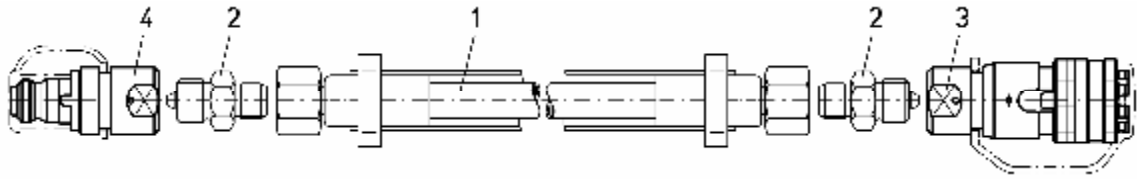

Pos.	Name	Article number
1	High Pressure hose	2-00578-_____
2	Adaptor M16x1.5 AG 58°DK / G1/4" AG / 60°	2-02822-2900
3	Fast-Lock coupling socket FVK30 M16x1.5 IG	1-06000-0001
4	Fast-Lock coupling nipple FVN30 M16x1.5 IG	1-06000-0002

ORDER DENOMINATION

„High Pressure hose, .. m length, with Fast-Lock coupling socket and - nipple F30,
Art.Nr. 2-00647-XXXX“ The last 4 digits define the length, e.g. 3m: 2-00647-0003.

LENGTHS ON STOCK FOR POS.1

0,5m; 1m; 2m; 3m; 4m; 5m; 6 m (Pos.01) All other lengths can be delivered upon request.

DELIVERY STATE:

Completely assembled, bled and filled with oil.

Standard filling is hydraulic oil ISO VG 15. Other liquids are available upon request.

All hoses are equipped with a protection hose. The data printed on the high pressure hose, i.e.: „EN/A578/5/XQJJ/PN3000“ are exclusively related to the high-pressure hose pos 1.

The minimal bending radius of the high pressure hose is 175 mm.

CAUTION: *The Fast-Lock coupling nipple Pos. 4 must not be used with pressurised while unconnected.*

TECHNICAL DATA:

High Pressure hose Pos. 01

max. operating pressure: 3.000 bar

Test pressure: 4.650 bar

min. Burst pressure: 6.200 bar

Inner diameter: 5,0 mm

Major diameter: 10,9 mm

Hose core: POM

Pressure bearers: 6 coiling shifts of corrosionproof spring steel wire

Top layer: PA, Nylon 11/12

Protection hose: PVC


Weight: 0,45 kg/m

Fast-Lock coupling socket and

- nipple F30 Pos. 03 + 04:

max. Operating Pressure: 3.000 / 4.000 bar

min. Burst pressure: 7.000 bar



FASTEC AG
 INDUSTRIEZONE
 SCHÄCHENWALD
 CH-6460 ALTENDORF
 SWITZERLAND

FON +41 41 875 78 30
 FAX +41 41 875 78 31
INFO@FASTEC.CH
WWW.FASTEC.CH