



## HIGH PRESSURE HOSE 700 BAR

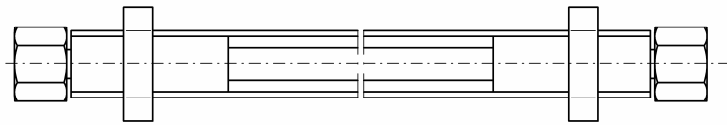

### ORDER DENOMINATION:

„High Pressure hose, .. m long, with cap nut on both ends M18x1.5,  
**Art.Nr. 2-00649-XXXX**“ The last 4 digits define the length, e.g. 3m: 2-00649-0003.

### LENGTHS ON STOCK:


2m; 3m; 4m; 5m; 6 m, 8m All other lengths can be delivered upon request.

### DELIVERY STATE:

Completely assembled, bled and filled with oil.  
*Standard filling is hydraulic oil. Other liquids are available upon request.*  
 All hoses are equipped with a protection hose. The data printed on the high-pressure hose, i.e.: „EN/A649/6/XQJJ/PN700“ are exclusively related to the high-pressure hose.  
 The minimal bending radius of the high pressure hose is 70 mm.

### TECHNICAL DATA:

High pressure hose  
 max. operating pressure: 700 bar  
 Test pressure: 1.400 bar  
 min. burst pressure: 2.800 bar  
 Inner diameter: 6,3 mm  
 Major diameter: 13,3 mm  
 Hose core: Polyamid 11/12  
 Pressure bearers: 2 spiral layers of high tensile steel wire  
 Top layer: PUR black  
 Protection hose: PVC  
 Weight: 0,31 kg/m



FASTEC AG  
 INDUSTRIEZONE FON +41 41 875 78 30  
 SCHÄCHENWALD FAX +41 41 875 78 31  
 CH-6460 ALTDORF INFO@FASTEC.CH  
 SWITZERLAND WWW.FASTEC.CH