


HIGH PRESSURE HOSE 4000 BAR

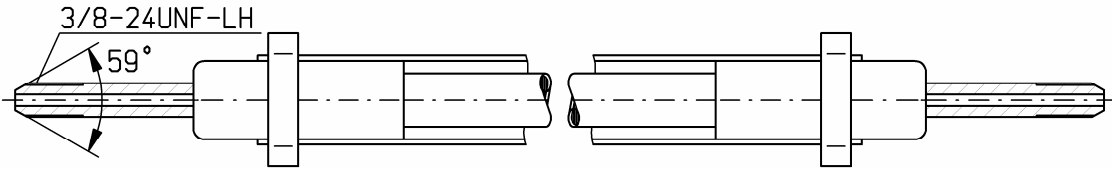

ORDER DENOMINATION:

„High Pressure hose, .. m long, with HP connector 3/8“ – 24 UNF LH on both ends,
Art.Nr. 2-06366-XXXX“ The last 4 digits define the length, e.g. 3m: 2-06366-0003.

LENGTHS ON STOCK:

2m; 3m; 4m All other lengths can be delivered upon request.

DELIVERY STATE:

Completely assembled, bled and filled with oil.

Standard filling is hydraulic oil. Other liquids are available upon request.

All hoses are equipped with a protection hose. The data printed on the high pressure hose, i.e.: „EN/.../XQJJ/PN4000“ are exclusively related to the high-pressure hose.

The minimal bending radius of the high pressure hose is 200 mm.

TECHNICAL DATA:

High pressure hose

max. operating pressure: 4.000 bar

min. burst pressure: 8.000 bar

Inner diameter: 4,5 mm

Major diameter: 15 mm


Hose core: POM

Pressure bearers: 8 shifts high-performance spring steel wire

Top layer: PA

Protection hose: PVC

Weight: 0,66 kg/m



FASTEC AG
 INDUSTRIEZONE FON +41 41 875 78 30
 SCHÄCHENWALD FAX +41 41 875 78 31
 CH-6460 ALTDORF INFO@FASTEC.CH
 SWITZERLAND WWW.FASTEC.CH