


## HIGH PRESSURE HOSE 3000 BAR

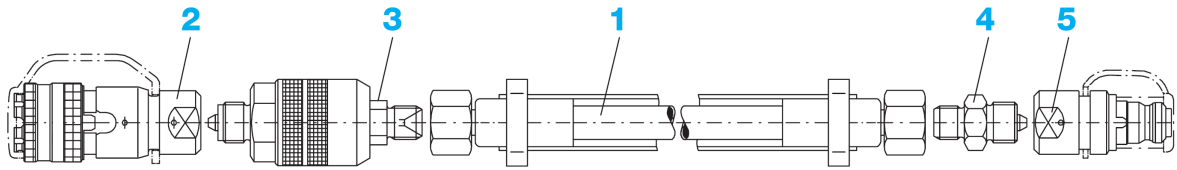

Pos.	Name	Article number
1	High Pressure hose	2-00578-____
2	Fast-Lock coupling socket FVK30 M16x1.5 IG	1-06000-0001
3	Turnable connector G1/4" AG / M16x1.5 AG 58°DK	2-05792-0000
4	Adaptor M16x1.5 AG 58°DK / G1/4" AG / 60°	2-02822-2900
5	Fast-Lock coupling nipple FVN30 M16x1.5 IG	1-06000-0002

### ORDER DENOMINATION:

„High Pressure hose, .. m length, with Fast-Lock coupling socket and - nipple F30,  
**Art.Nr. 2-06460-XXXX**“ The last 4 digits define the length, e.g. 3m: 2-06460-0003.

### LENGTHS ON STOCK FOR POS.1

0,5m; 1m; 2m; 3m; 4m; 5m; 6 m (Pos.01) All other lengths can be delivered upon request.

### DELIVERY STATE:

Completely assembled, bled and filled with oil.

*Standard filling is hydraulic oil ISO VG 15. Other liquids are available upon request.*

All hoses are equipped with a protection hose. The data printed on the high-pressure hose, i.e.: „EN/A578/5/XQJJ/PN3000“ are exclusively related to the high-pressure hose pos 1.

The minimal bending radius of the high pressure hose is 175 mm.

**CAUTION:** *The Fast-Lock coupling nipple Pos. 5 must not be pressurised while unconnected !*

### TECHNICAL DATA:

High pressure hose pos. 01

max. operating pressure: 3.000 bar

Test pressure: 4.650 bar

min. burst pressure: 6.200 bar

Inner diameter: 5,0 mm

Major diameter: 10,9 mm

Hose core: POM

Pressure bearers: 6 coiling shifts of corrosion proof spring steel wire

Top layer: PA, Nylon 11/12

Protection hose: PVC


Weight: 0,45 kg/m

Fast-Lock coupling socket and

- nipple F30 Pos. 03 + 04:

max. operating pressure: 3.000 / 4.000 bar

min. burst pressure: 7.000 bar



FASTEC AG  
 INDUSTRIEZONE  
 SCHÄCHENWALD  
 CH-6460 ALTDORF  
 SWITZERLAND

FON +41 41 875 78 30  
 FAX +41 41 875 78 31  
 INFO@FASTEC.CH  
 WWW.FASTEC.CH