


HIGH PRESSURE HOSE 4000 BAR

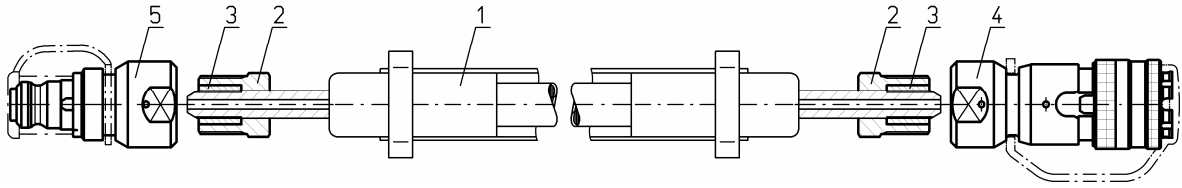

Pos.	Name	Article number
1	High Pressure hose	2-06366-____
2	Pressure screw M20x1.5	1-00045-0200
3	Pressure ring 3/8-24 UNF LH	1-00045-0300
4	Fast-Lock coupling socket FVK30 M20x1.5 IG	1-06000-0003
5	Fast-Lock coupling nipple FVN30 M20x1.5 IG	1-06000-0004

ORDER DENOMINATION:

„High Pressure hose, .. m length, with Fast-Lock coupling socket and - nipple F30, *Art.Nr. 1-00045-XXXX*“ The last 4 digits define the length, e.g. 3m: 1-00045-0003.

LENGTHS ON STOCK FOR POS.1

1m; 2m; 3m; 4m; 5m; 6 m (Pos.01) All other lengths can be delivered upon request.

DELIVERY STATE:

Completely assembled, bled and filled with oil.

Standard filling is hydraulic oil ISO VG 15. Other liquids are available upon request.

All hoses are equipped with a protection hose. The data printed on the high pressure hose, i.e.: „EN/.../XQJJ/PN4000“ are exclusively related to the high-pressure hose pos 1.

The minimal bending radius of the high pressure hose is 200 mm.

CAUTION: *The Fast-Lock coupling nipple Pos. 5 must not be pressurised while unconnected !*

TECHNICAL DATA:

High pressure hose pos. 01

max. operating pressure: 4.000 bar

min. burst pressure: 8.000 bar

Inner diameter: 4,5 mm

Major diameter: 15 mm

Hose core: POM

Pressure bearers: 8 coiling shifts of corrosion proof spring steel wire

Top layer: PA

Protection hose: PVC


Weight: 0,66 kg/m

Fast-Lock coupling socket and

- nipple F30 Pos. 03 + 04:

max. operating pressure: 4.000 (3.000) bar

min. burst pressure: 7.000 bar

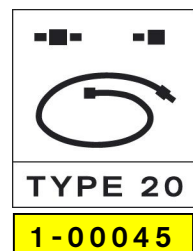

FASTEC AG
 INDUSTRIEZONE FON +41 41 875 78 30
 SCHÄCHENWALD FAX +41 41 875 78 31
 CH-6460 ALTDORF INFO@FASTEC.CH
 SWITZERLAND WWW.FASTEC.CH