


HIGH PRESSURE HOSE 1600 BAR

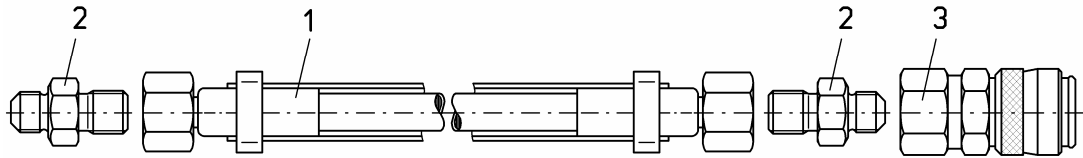

Pos.	Name	Article number
1	High Pressure hose	2-00580-_____
2	Adaptor G1/4" AG / M14x1.5 AG / 60°	2-00594-0000
3	Fast-Lock coupling socket CVK16 G1/4" IG	1-00043-0001

ORDER DENOMINATION:

„High Pressure hose, .. m length, with Fast-Lock coupling socket CVK16,
Art.No. 1-00433-XXXX“ The last 4 digits define the length, e.g. 3m: 1-00433-0003.

LENGTHS ON STOCK FOR POS.1


0,5m; 1 m; 2m; 3m; 4m; 5m; 6 m (Pos.01) All other lengths can be delivered upon request.

DELIVERY STATE:

Completely assembled, bled and filled with oil.
Standard filling is hydraulic oil ISO VG 15. Other liquids are available upon request.
 All hoses are equipped with a protection hose. The data printed on the high pressure hose, i.e.: „EN/A580/5/XQJJ/PN1800“ are exclusively related to the high-pressure hose pos 1.
 The minimal bending radius of the high pressure hose is 130 mm.

TECHNICAL DATA:

High pressure hose pos. 01	Fast-Lock coupling socket
max. operating pressure: 1.800 bar	CVK16 Pos. 03:
Test pressure: 2.700 bar	max. operating pressure: 1.600 bar
min. burst pressure: 4.500 bar	min. burst pressure: 3.000 bar
Inner diameter: 5,0 mm	
Major diameter: 11,2 mm	
Hose core: POM	
Pressure bearers: 4 coiling shifts of corrosion proof spring steel wire	
Top layer: PA, Nylon 11/12	
Protection hose: PVC	
Weight: 0,26 kg/m	



FASTEC AG
 INDUSTRIEZONE
 SCHÄCHENWALD
 CH-6460 ALTDORF
 SWITZERLAND
 FON +41 41 875 78 30
 FAX +41 41 875 78 31
 INFO@FASTEC.CH
 WWW.FASTEC.CH